


Superior product line

# Button S Jeweller

Wireless smart button.

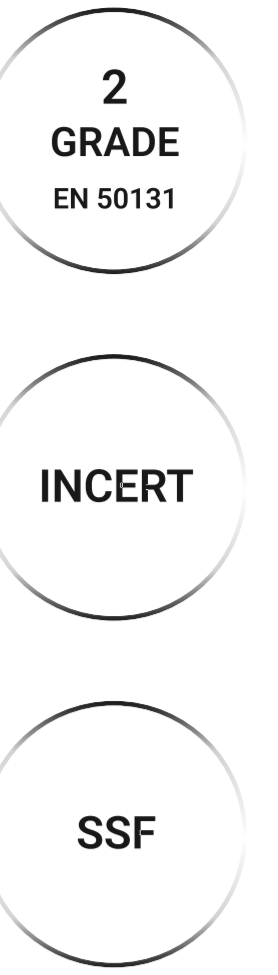

## What's new

Baseline <b>Button Jeweller</b>	Superior <b>Button S Jeweller</b>
Available for all PROs	Available only for accredited partners

This is the device of the **Superior product line**. Superior products are advanced versions of the Jeweller devices. This product line is developed for projects. Only accredited Ajax Systems partners can sell, install, and administer Superior products.

## Operation modes

Button supports 3 modes: **panic button, automation device control, mute interconnected fire alarm**. Operation mode is adjusted by the PRO or user with admin rights in Ajax apps.

## Event types

Button supports 8 event types: **intrusion, fire, auxiliary alarm, panic button, gas alarm, malfunction, leakage, custom**. Event type is adjusted by the PRO or user with admin rights in Ajax apps.

Protection against accidental alarm activation: double or long press




### Jeweller communication technology

- Up to 1,300 m of radio communication in an open space
- Encryption and device authentication to prevent spoofing
- Regular polling to display current device statuses



### Flawless autonomy

- Up to 5 years of operation
- Pre-installed battery
- Low battery warning
- Battery status supervision



### Quick installation and setup

- Pairing with a hub via QR code
- Remote control and configuration in the app
- It can be carried around on the wrist, on the neck, or on the key ring
- Fixing on a flat surface with a Holder bracket (sold separately)



Superior, Fibra, and Baseline product lines are mutually compatible. This opens up numerous possibilities for building systems of any configuration.

<p><b>Compliance with standards</b></p> <p>EN 50131-3 (Grade 2) INCERT SSF</p>	<p><b>Compatibility</b></p> <p><b>Hubs</b> Hub Plus Jeweller Hub 2 (2G) Jeweller Hub 2 (4G) Jeweller Hub 2 Plus Jeweller Hub Hybrid (2G) Hub Hybrid (4G)</p> <p><b>Range extenders</b> ReX Jeweller, ReX 2 Jeweller</p>	<p><b>Communication with control panel</b></p> <p><b>Jeweller communication technology</b></p> <p><b>Frequency bands</b> 868.0–868.6 MHz</p> <p><b>Jeweller communication range</b> up to 1,300 m In an open space.</p>	<p><b>Power supply</b></p> <p><b>Battery</b> 1 × CR2032 Pre-installed.</p> <p><b>Battery life</b> up to 5 years</p> <p><b>Manufacturer</b> Renata</p>
<p><b>Installation</b></p> <p><b>Operating temperature range</b> from –10°C to +40°C</p> <p><b>Operating humidity</b> up to 75%</p> <p><b>Protection class</b> IP55</p>	<p><b>Enclosure</b></p> <p><b>Colour</b> white, black</p> <p><b>Dimensions</b> 47 × 35 × 13 mm</p> <p><b>Weight</b> 16 g</p>	<p><b>Complete set</b></p> <p>Button S Jeweller 1 × CR2032 battery (pre-installed) Double sided tape Quick start guide</p>	



For detailed information, scan the QR code or follow the link:  
[ajax.systems/support/devices/button-s/](https://ajax.systems/support/devices/button-s/)

- ✉ support@ajax.systems
- 📍 @AjaxSystemsSupport\_Bot
- 🌐 ajax.systems