


CA8-100-H

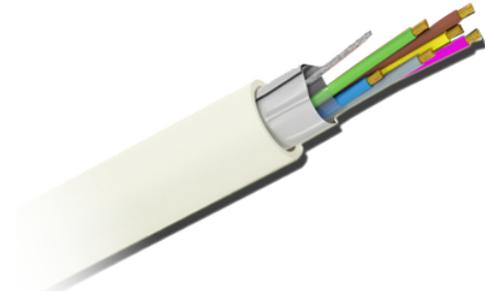

Features

- Bobbin of cable
- 100 m
- Alarm
- 8 conductors
- Inner conductor Class 5 Flexible electrolytic copper 0,22 mm²
- PE isolation
- Screen Aluminium polyester with 96% coverage+CuSn drainage
- Polyolefin Sheath LSH0
- Halogen free
- CPR Certificate: B2ca -s1a, d0, a1

Specifications

Length	100 m
Interior conductor	Flexible electrolytic copper AWG24 0,22 mm ² Class 5
Isolation	Polyethylene
Formation of the wires	Twisted
Screen	Aluminium polyester with 96% coating+CuSn drainage
External cover	Polyolefin LHS0
Number of conductors	8 signal
Conductivity	<10 ⁷ S/mm
Resistance	106 Ohm/km signal
Temp. operation	0° C ~ 70° C
Certification	CPR (B2ca -s1a, d0, a1), UNE EN 50575, UNE EN 60332-1-2, UNE EN 50399, UNE EN 61034-2, UNE EN 60754-2